Tel. +49 511 473 530 91
Fax +49 511 473 530 88

GS-M2M accessories GmbH, Albert-Einstein-Straße 13, 30926 Seelze E-Mail gs@gs-m2m.de

GS-ANT-88-300

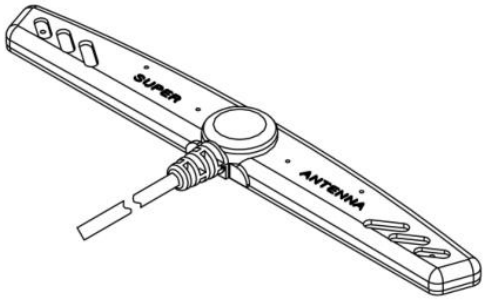

Technical Data		
2G, 3G, 4G		
Cellular	Frequency Range	699-960 / 1710-2690 MHz
	VSWR	< 2.5
	Gain	2.0 dBi (Zenith)
	Impedance	50 Ω
	Polarization	Linear
Mechanical Data		
	Dimensions (HxLxW)	ca. 8.6mm ± 1.0mm x 126mm ± 2.0mm x 16.2mm
	Connection (standard)	2.5 m connecting cable RG174
	Connector	SMA male
	Glass mount	
	RoHS compliant	

Tel. +49 511 473 530 91
Fax +49 511 473 530 88

GS-M2M accessories GmbH, Albert-Einstein-Straße 13, 30926 Seelze E-Mail gs@gs-m2m.de

GS-ANT-88-300

Mechanical drawing:

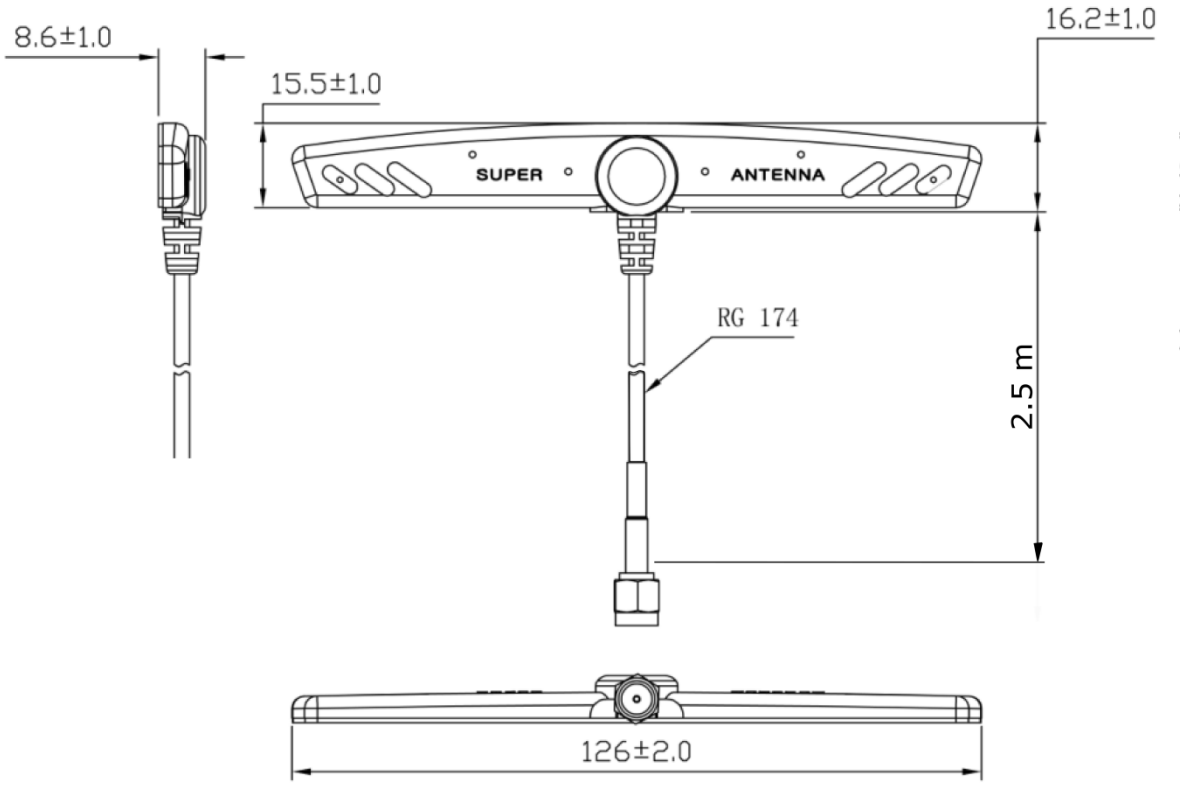

Diagramms:

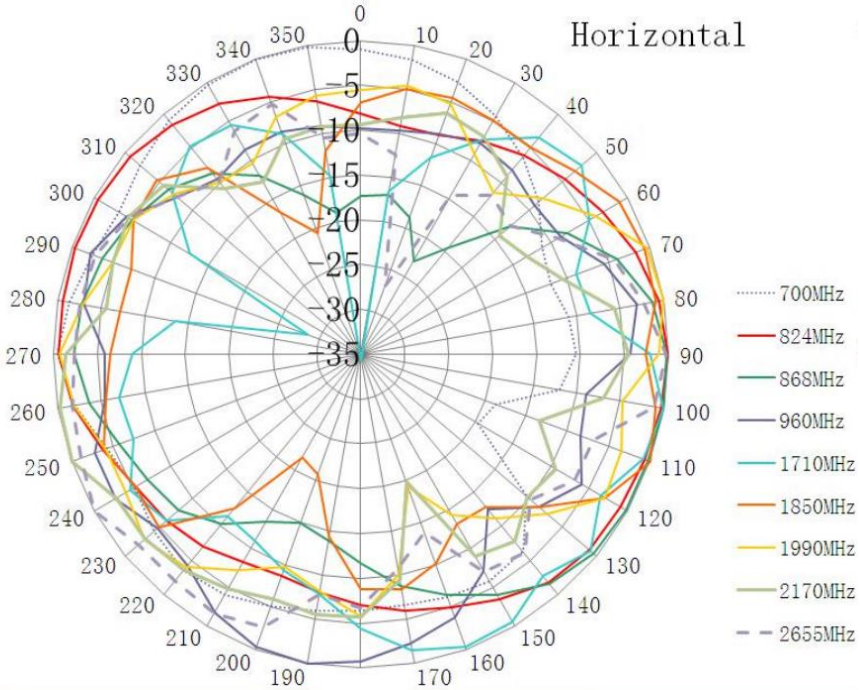

Tel. +49 511 473 530 91
Fax +49 511 473 530 88

GS-M2M accessories GmbH, Albert-Einstein-Straße 13, 30926 Seelze E-Mail gs@gs-m2m.de
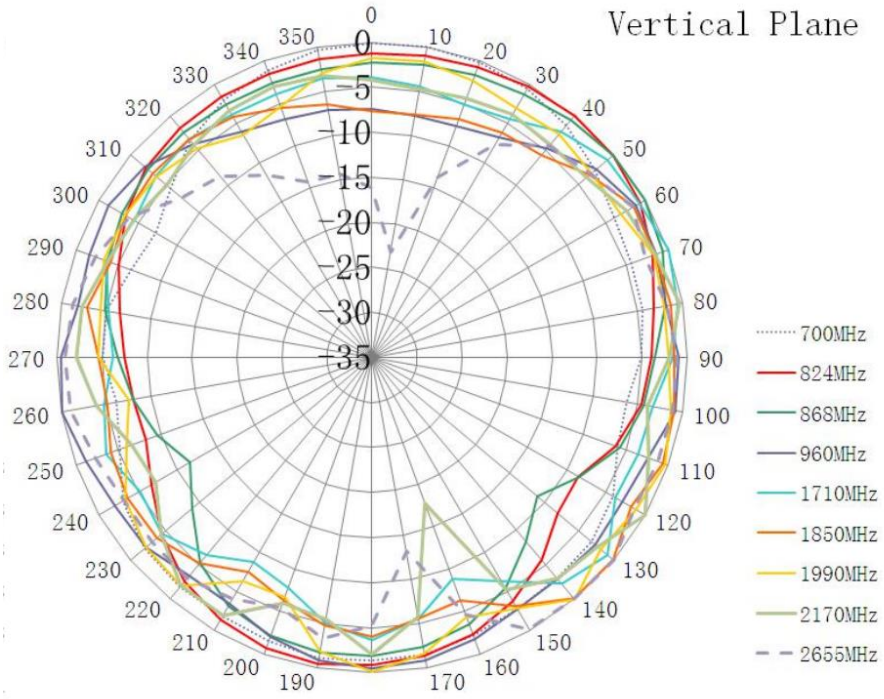
GS-ANT-88-300