



GS-ANT-901-FME

GS-ANT-901-SMA





Technical Data		
GSM, UMTS		
GSM		
	Frequency Range	890 – 960 MHz 1710 – 2150 MHz
	V.S.W.R.	< 2.0
	Gain	0/0 dB
	Power Max.	5 W
	Impedance	50 Ω
	Polarization	linear
Mechanical Data		
	Dimensions (ØxL)	ca. 45 mm x 22 mm
	Weight	40 g
	Cable	ca. 3m RG174
	Connector (variants)	...-FME FME (f) 
		...-SMA SMA (m) 
	Thread	M12

GS-ANT-901-FME

GS-ANT-901-SMA

VSWR

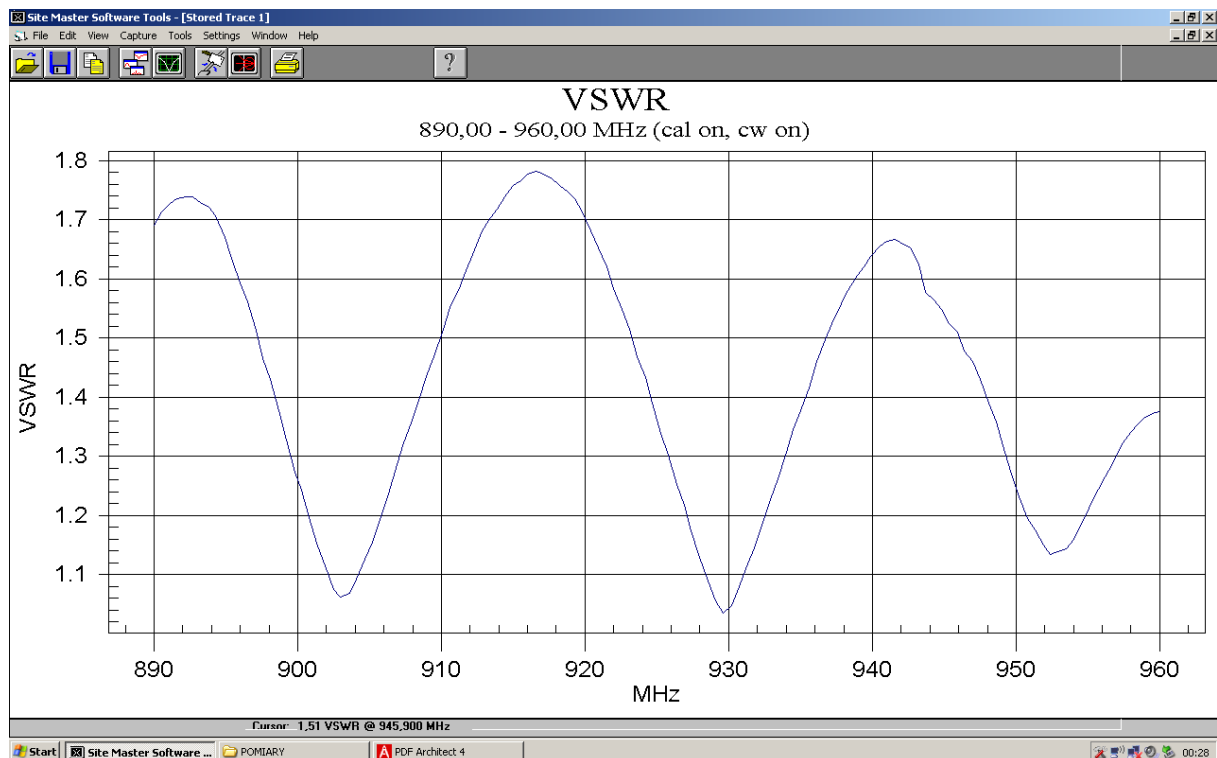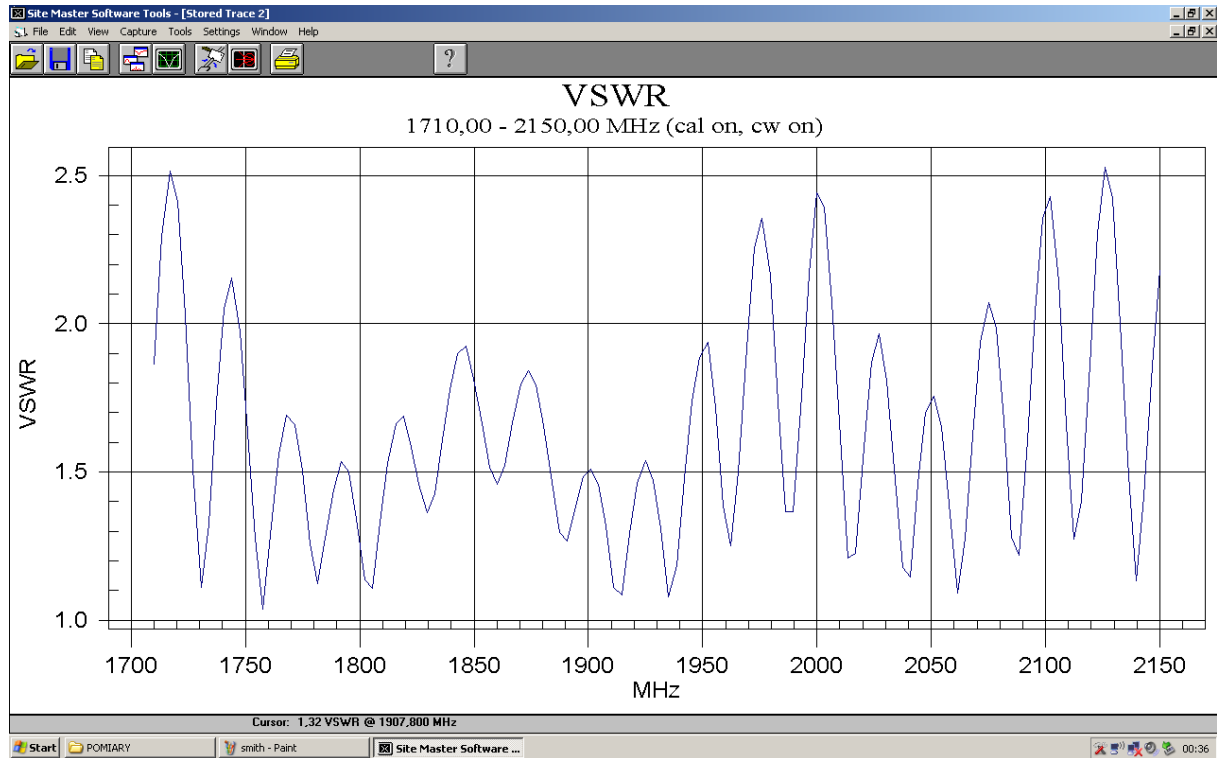

GS-ANT-901-FME

GS-ANT-901-SMA

Smith Charts

