


GS-ANT-45-3800



Technical Data		
5G, 4G, 3G, 2G wall mount, multiband antenna		
	Frequency Range	698 - 960 MHz 1427 - 1518 MHz 1710 - 2170 MHz 2300 - 2690 MHz 3300 - 3800 MHz
	Bands	5G 700/800/900/1500/1800/2100/2600/3500 MHz LTE 700/800/1800/1900/2600 MHz UMTS 700/800/900/2100 MHz GSM 850/900/1800/1900 MHz WIFI 2.4 GHz
	Antenna Type	End-fed $\frac{1}{2}$ λ dipole – no groundplane needed
	Gain	0 dB, 2, 15 dBi (698-960 MHz) 3 dB, 5, 15 dBi (1427-1518 / 1710-2170 MHz) 7 dB, 9, 15 dBi (2300-2690 / 3300-3800 MHz)
	VSWR	< 3.0:1 (698-960 MHz) < 2.5:1 (1427-2690 / 3300-3800 MHz)
	Input Power Max.	100 W
	Impedance	50 Ω
	Radiation Pattern	Omni-directional
RoHS compliant		

GS-ANT-45-3800

Mechanical Data		
	Dimensions	ca. 457 mm x Ø 32 mm
	Ingress Protection	IP66
	Color	White
	Cable	No cable supplied
	Connector	N - female

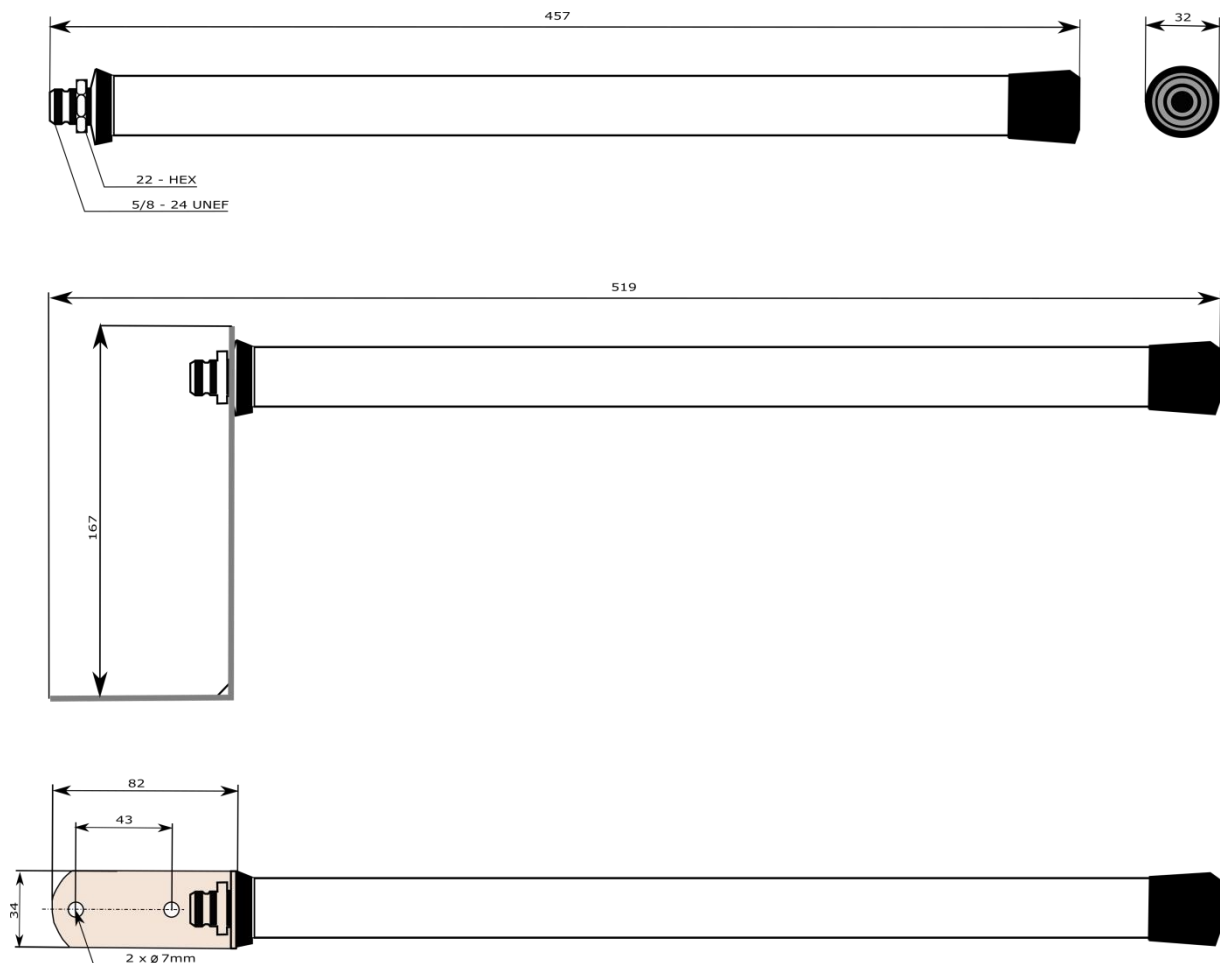

GS-ANT-45-3800

