



SMA - Stecker

SMA - Buchse

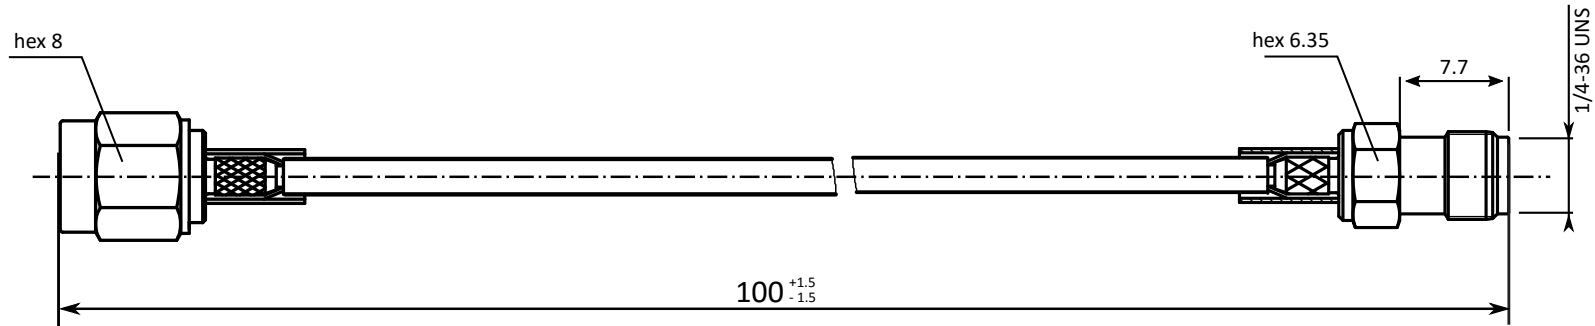

cable detail



**1. Inner conductor**

Material: Copper  
Diameter: 0.95mm

**2. Dielectric**

Material: PE, foamed  
Diameter: 2.8mm

**3. Outer conductor, tape**

Material: AL-PE-AL  
Diameter: 2.95mm

**4. Outer conductor, braid**

Material: Copper, tinned  
Diameter: 3.4mm

**5. Jacket**

Material: PE, black  
Diameter: 5.0mm

**Characteristics**

Impedance: 50 Ohm  
Capacity: 80 pF / m  
Working voltage: 1 kV (DC)  
Velocity ratio: 80 %  
Screening effectiveness: > 85 dB  
Operating temperature: -30°C .. +70°C  
Cable weight: 36.6 kg/ km



Erstellt Herr Heinze	Freigabe Frau S. Grote	Sachnummer TG-KAB-LL-10CM-203			
Titel SMA-Kabel-St / SMA-Kabel-Bu LowLoss - Kabel L = 100mm		Dokumentenart DIN A 4			
Maßstab 1:1	Änd.	Ausgabedatum 24.01.2020	Spr. DE	Blatt 1/1	