



TNC - Stecker

FME - Buchse

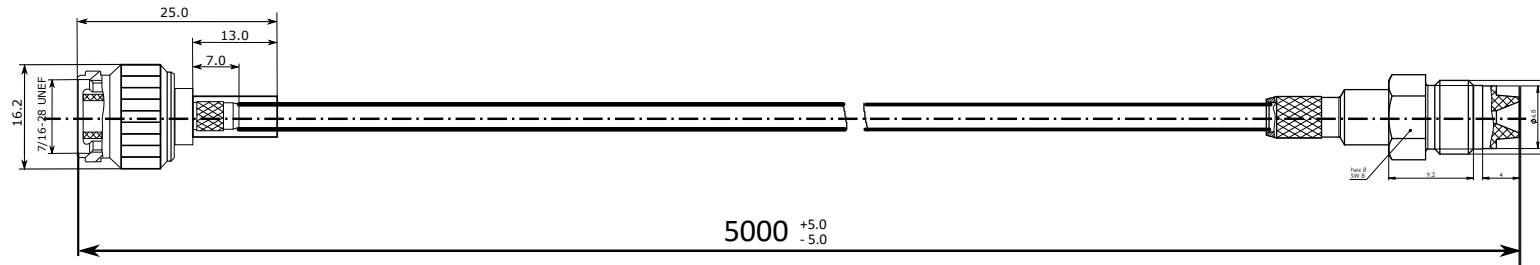

cable detail



1. Inner conductor

Material: Copper
Diameter: 0.95mm

2. Dielectric

Material: PE, foamed
Diameter: 2.8mm

3. Outer conductor, tape

Material: AL-PE-AL
Diameter: 2.95mm

4. Outer conductor, braid

Material: Copper, tinned
Diameter: 3.4mm

5. Jacket

Material: PE, black
Diameter: 5.0mm

Characteristics

Impedance: 50 Ohm
Capacity: 80 pF / m
Working voltage: 1 kV (DC)
Velocity ratio: 80 %
Screening effectiveness: > 85 dB
Operating temperature: -30°C .. +70°C
Cable weight: 36.6 kg/ km



Erstellt Herr Heinze	Freigabe Frau S. Grote	Sachnummer TG-KAB-LL-5M-TNC-FME			
Titel TNC-Kabel-St / FME-Kabel-Bu LowLoss - Kabel L = 5000 mm		Dokumentenart DIN A 4			
Maßstab	Änd.	Ausgabedatum 25.01.2021	Spr. DE	Blatt 1/1	