


cable detail RG58 (Leoni Dacar 110)

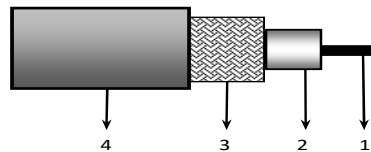

**1. Inner conductor**

Material: Cu tinned  
Diameter: 0.90 mm

**2. Dielectric**

Material: PE  
Diameter: 2.95 mm

**3. Outer conductor**

Material: Copper  
Diameter: 4.95 mm


**4. Jacket**

Material: PVC

**Characteristics**

Impedance: 50  $\Omega$   
Capacity at 1kHz: 105 pF / m  
Conductor resistance @ 20°C: 41  $\Omega$ /km  
Velocity of propagation: 66 %  
Attenuation @ 1GHz: 60.4 dB/100m  
Attenuation @ 2GHz: 92.7 dB/100m  
Attenuation @ 3 GHz: 126.3 dB/100m  
Operating temperature: -40°C .. +85°C  
Cable weight: 39.0 kg/ km



 Toleranzen nach ISO 2768-1 (SG)	Erstellt Herr K.Heinze	Freigabe Frau S. Grote	Sachnummer RG58-KABEL-FME-003			
	Titel FME-Stecker / FME-Stecker 5m RG58 - Kabel		Dokumentenart DIN A 4			
	Maßstab 1:1	Änd.	Ausgabedatum 08.06.2022	Spr. DE	Blatt 1/1	

weitere Längen und Konfigurationen auf Anfrage