


cable detail RG58 (Leoni Dacar 110)

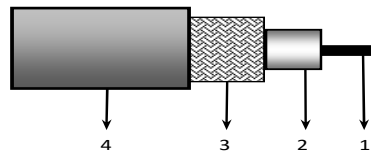

1. Inner conductor

Material: Cu tinned
Diameter: 0.90 mm

2. Dielectric

Material: PE
Diameter: 2.95 mm

3. Outer conductor

Material: Copper
Diameter: 4.95 mm

4. Jacket

Material: PVC

Characteristics

Impedance: 50 Ω
Capacity at 1kHz: 105 pF / m
Conductor resistance @ 20°C: 41 Ω/km
Velocity of propagation: 66 %
Attenuation @ 1GHz: 60.4 dB/100m
Attenuation @ 2GHz: 92.7 dB/100m
Attenuation @ 3 GHz: 126.3 dB/100m
Operating temperature: -40°C .. +85°C
Cable weight: 39.0 kg/ km

Verfügbare Längenvariante

L = 1m RG58-KABEL-FME-009 L = 7m RG58-KABEL-FME-014
L = 2m RG58-KABEL-FME-016 L = 10m RG58-KABEL-FME-001
L = 3m RG58-KABEL-FME-015 L = 15m RG58-KABEL-FME-005
L = 5m RG58-KABEL-FME-002 L = 20m RG58-KABEL-FME-004

weitere Längen und Konfigurationen auf Anfrage



Toleranzen nach ISO 2768-1 (SG)

Erstellt Herr K.Heinze	Freigabe Frau S. Grote	Sachnummer RG58-KABEL-FME-St-Bu-0xx			
Titel FME-Stecker / FME-Buchse RG58 - Kabel		Dokumentenart DIN A 4			
Maßstab 1:1	Änd.	Ausgabedatum 08.06.2022	Spr. DE	Blatt 1/1	