


cable detail RG58 (Leoni Dacar 110)

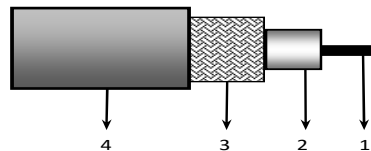

**1. Inner conductor**

Material: Cu tinned  
Diameter: 0.90 mm

**2. Dielectric**

Material: PE  
Diameter: 2.95 mm

**3. Outer conductor**

Material: Copper  
Diameter: 4.95 mm

**4. Jacket**

Material: PVC

**Characteristics**

Impedance: 50 Ω  
Capacity at 1kHz: 105 pF / m  
Conductor resistance @ 20°C: 41 Ω/km  
Velocity of propagation: 66 %  
Attenuation @ 1GHz: 60.4 dB/100m  
Attenuation @ 2GHz: 92.7 dB/100m  
Attenuation @ 3 GHz: 126.3 dB/100m  
Operating temperature: -40°C .. +85°C  
Cable weight: 39.0 kg/ km

Verfügbare Längenvariante

L = 1m RG58-KABEL-SMA-SMA-009	L = 10m RG58-KABEL-SMA-SMA-000
L = 2m RG58-KABEL-SMA-SMA-010	L = 12m RG58-KABEL-SMA-SMA-000
L = 2,5m RG58-KABEL-SMA-SMA-006	L = 15m RG58-KABEL-FME-012
L = 3m RG58-KABEL-SMA-SMA-008	L = 20m RG58-KABEL-FME-017
L = 5m RG58-KABEL-SMA-SMA-001	L = 25m RG58-KABEL-FME-011
L = 7m RG58-KABEL-SMA-SMA-007	
L = 8m RG58-KABEL-SMA-SMA-014	

weitere Längen und Konfigurationen auf Anfrage



Toleranzen nach ISO 2768-1 (SG)

Erstellt

Herr K.Heinze

Freigabe

Frau S. Grote

Sachnummer

RG58-KABEL-SMA-SMA-0xx

Titel

SMA-Stecker / SMA-Buchse  
RG58 - Kabel

Dokumentenart

DIN A 4

Maßstab	Änd.	Ausgabedatum	Spr.	Blatt
1:1		08.06.2022	DE	1/1